

CRM-2H UNI



Specifications

ETI Code	002470003
Description	CRM-2H UNI
Class name	Time relay
Function	Time relay
Rated current (A)	16
Voltage type	AC/DC
Supply voltage (V)	12 - 240
Type of contacts	CO
Number of contacts	1
Time range	0.1 s-100 days
Number of functions	2
Maximum load capacity at AC1 (VA)	4000

Online product page [🔗](#)

Other documentation







[Technical data catalogue](#)
[3D Model](#)
[Instruction manual](#)
[CE declaration](#)
[Eplan file](#)

ETIM international classification


Classification	EC001669
Class name	Timer relay for distribution board
Rated current	16
Voltage type	AC/DC
Type of excitation	Digital with single function
Function	On/off-switch wiping relay
1st interval unit	Minutes/hours
1st interval	0.02...2400
2nd interval unit	Minutes/hours
2nd interval	0.02...2400
Mounting method	DIN rail
Width in number of modular spacings	1
Built-in height	65mm
Number of changeover switches	1
Control voltage 1	12...12V
Type of control voltage 1	AC/DC
Frequency control voltage 1	50...50Hz
Control voltage 2	240...240V
Type of control voltage 2	AC
Frequency control voltage 2	50...60Hz
Nominal switching current at 250 V AC	16A

Dimension drawing

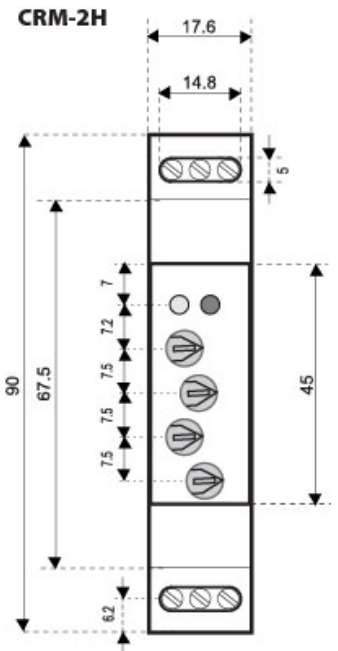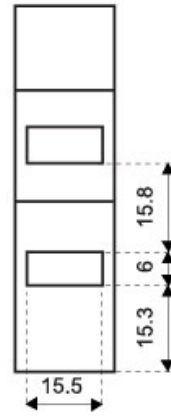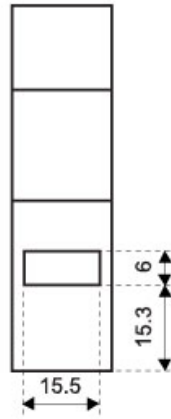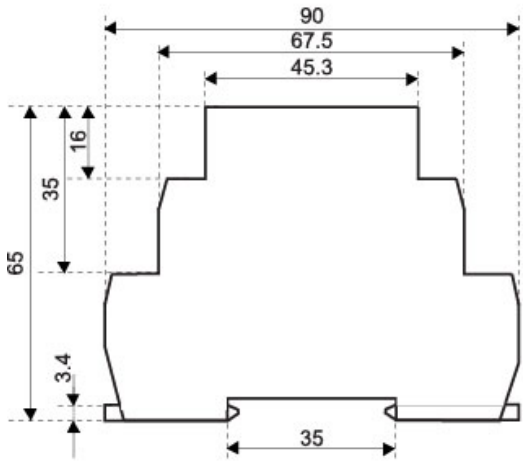


Symbol/Connection

Perioda začne z impulzom

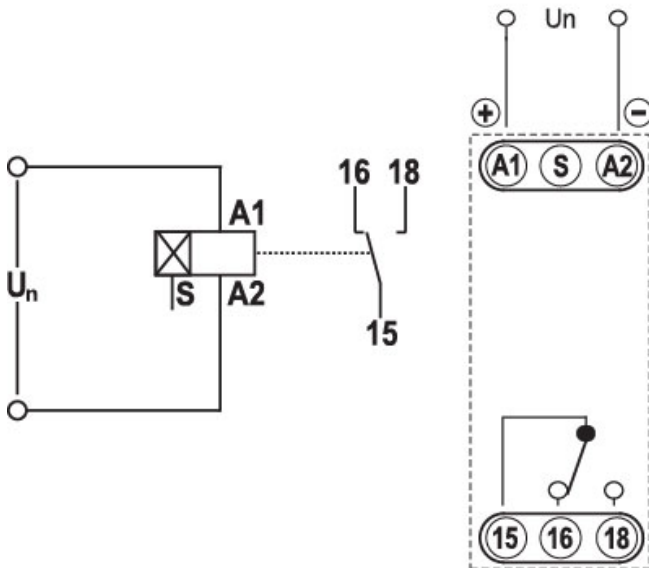

Perioda začne s premorom

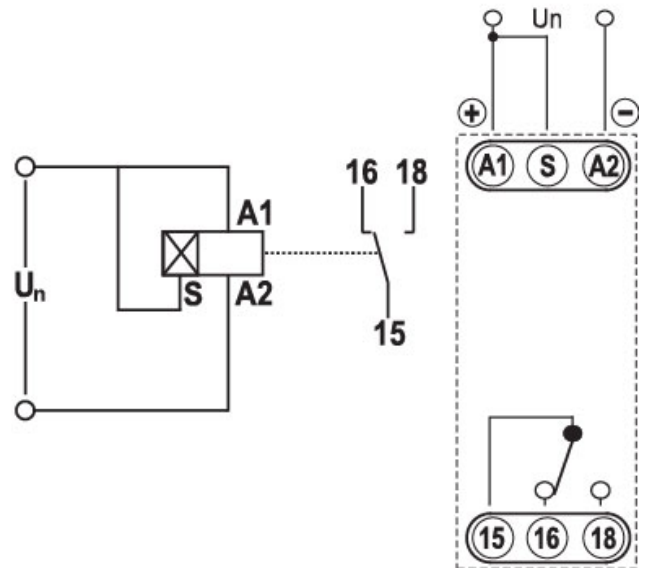

Description

